ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

BOSCH / INDUCTION COOKTOP

Series 6 80cm Induction Cooktop with Integrated Ventilation



RANGE
Series 6
TYPE
Induction cooktop
WIDTH
80 cm
FUEL
Induction
FINISHES
Black glass
CODE
PVQ811H26E

WARRANTY (DOMESTIC USE)

Manufacturer's warranty: 2 years

Conditions: domestic use; proof of purchase; bought and used in Australia. Summary of the Bosch warranty terms and conditions, checked 7 November 2026. Full terms from Romano or the brand.


FEATURES

- Induction cooktop and downdraft extraction in one
- 4 zones with 2 CombiZones
- Up to 622 m^3/h extraction in boost
- PerfectFry Plus frying sensor
- Home Connect Wi-Fi control

DIMENSIONS

The dimension drawing and full specifications from Bosch follow on the next page.

Series 6, 2-in-1 cooktop with integrated ventilation, 80 cm, surface mount without frame PVQ811H26E

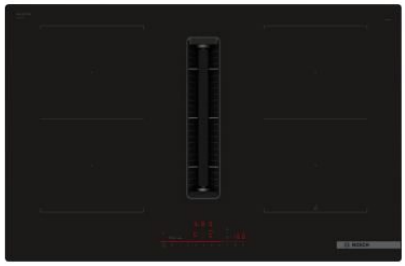

The induction cooktop with integrated ventilation module: combines induction with ventilation technology for perfect results.

- **Integrated ventilation**: Extracts steam and cooking odours directly from the source.
- **CombiZone**: Combines two cooking zones to create one large area for bigger cookware.
- **PerfectFry Plus**: Intelligently controls pan temperature for optimal frying and consistent results.
- **AutoOn function**: Ventilation turns on automatically when the cooktop heats up.
- **Favourite button**: Personalise your cooktop with the Home Connect app.

1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

HEZ32WA00 Wireless food thermometer, HEZ390522 Griddle Plate, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9SE030 Set of 2 pots and 1 pan, HEZ9SE060 6 pieces Set, HEZ9TY010 Teppan Yaki, HEZ9VDKE1 Exhaust kit, HEZ9VDKR0 Recirculation kit 2 L-bow (70cm), HEZ9VDSB1 90° flat duct bend horizontal, HEZ9VDSB2 90° flat duct L vertical, HEZ9VDSB3 90° flat duct M vertical, HEZ9VDSB4 90° flat duct S vertical, HEZ9VDSI0 Adapter round-flat, HEZ9VDSI1 90° Adapter round-flat, HEZ9VDSM1 Straight tube 500mm, HEZ9VDSM2 Straight tube 1000mm, HEZ9VDSS1 Connector sleeve (female), HEZ9VDSS2 Flex sleeve (female), HEZ9VEDU0 Acoustics Filter, HEZ9VRCR1 Clean Air Plus odor filter (replacement), HEZ9VRPD1 Plinth Diffusor

Product name/family:	Cooking zone ceramic
Built-in / Free-standing:	Built-in
Energy input:	Electric
Total number of positions that can be used at the same time:	4
Required niche size for installation (HxWxD):	223 x 750-750 x 490-490 mm
Width of the appliance:	802 mm
Dimensions (HxWxD):	223x802x522 mm
Dimensions of the packed product (HxWxD):	431x950x672 mm
Net weight:	25.3 kg
Gross weight:	30.0 kg
Residual heat indicator:	Yes
Location of control panel:	Front
Basic surface material:	Ceramic glass
Color of surface:	Black
Length electrical supply cord:	110 cm
Sealed Burners:	No
Heating with booster:	All
Power of 2nd heating element (kW):	3600.0 W
Number of power settings:	9-stage + 2 intensive
Max. air extraction:	500 m^3/h
Boost position output recirculating:	595.0 m^3/h
Max. air recirculation:	487 m^3/h
Boost position air extraction:	622 m^3/h
Noise level:	69 dB(A) re 1 pW
Odour filter:	No
Clean filter reminder:	Yes
Fuse protection:	GENERAL.N_A A
Voltage:	220-240/380-415 V
Frequency:	50-60 Hz
Main colour of product:	Black
Included accessories:	1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

4 242005 433612

Pages from Bosch's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

Series 6, 2-in-1 cooktop with integrated ventilation, 80 cm, surface mount without frame PVQ811H26E

The induction cooktop with integrated ventilation module: combines induction with ventilation technology for perfect results.

- 80 cm cooktop: space for 4 pots or pans

Flexibility of cooking zones

- 2 Combi zones: use bigger cookware by connecting two classic cooking zones into one large zone.
- Cooking zone front left: 190 mm, 210 mm, 2.5 KW (max. power 3.7 KW)
- Cooking zone rear left: 190 mm, 210 mm, 2.5 KW (max. power 3.7 KW)
- Cooking zone rear right: 190 mm, 210 mm , 2.5 KW (max power 3.7 KW)
- Cooking zone front right: 210 mm, 190 mm, 2.5 KW (max. power 3.7 KW)

Comfort & Convenience

- DirectSelect: effortlessly change the power with the imprinted touch bar.
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm, selectable via Favourite button/Home Connect App (for appliances connected to Home Connect account): keep dishes warm at preset low power level.
- Favourite Button: directly access favourite functions with a configurable button (available with connected Home Connect account).
- Switch-off timer: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down-timer (can be chosen instead of switch-off timer): an alarm sounds at the end of the time set (e.g. for pasta).
- Sound volume adaptable to personal preference and needs.

Cooking assistance

- PerfectFry Plus sensor: choose from 11 predefined temperatures in a range from 70°C up to 220°C: prevents scorching with the automatic temperature regulation of the integrated sensor.
- Cooktop Cooking Assistant (only via Home Connect App): easily find the right temperature setting for a certain dish via the Home Connect app.

Time saving & efficiency

- Power Boost for all zones : boil water faster with up to 50% more power than at the highest standard level.
- Pan Boost, selectable via Favourite button/Home Connect App (for appliances connected to Home Connect account): heat up pans more quickly than at the highest standard level while protecting the pan coating.
- QuickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- ReStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

Connectivity

- Remote Monitoring and Control: check if the cooktop is switched off even when not at home, and find recipes or additional functions in the Home Connect app.
- Smart home trigger, via Favourite button (available with connected Home Connect account): open up the smart universe from your cooktop (partner service required).
- Updateable appliance (available with connected Home Connect account): easily keep your appliance up to date with the latest software.

Design

- Frameless: slightly raised installation without metal trim.

Safety

- Digital 2-stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- Pause function: pause the heating process (e.g to answer the door).
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.

Installation

- Dimensions of the product (HxWxD mm): 223 x 802 x 522
- Required niche size for installation (HxWxD mm) : 223 x 750 x (490 - 490)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- PowerManagement Function: enables the total power of the cooktop to be limited if necessary (for suitability and installation, consult a licensed electrician).
- Power cord: 1.1 m, Cable included

Accessories

- Clean Air Plus odor filter, Slider for unducted recirculation included
- Installation into 60 cm floor cupboard possible

Integrated ventilation downdraft system

- Induction cooktop with fully integrated high-performance downdraft extractor.
- Suitable for ducted or recirculated extraction configuration (incl. differentiated software modes). Installation accessories for unducted recirculation, among these four cleanAir odor filters and a telescopic slider element, are included in the cooktop. Accessories for other installation options are available, details in the planning notes.
-
- Aesthetically integrated fully flush air intake design with floating, heat resistant glass ceramics element for free movement and placement of cookware.
- Automatic switch-on of ventilation system when a cooking zone is used.
- Automatic delayed shut-off after cooking to erase residual odors after cooking (in specific ultra low-noise fan level, 12min in ducted extraction, 30min in recirculated extraction, can be shut-off manually).
- High-performance, low-noise blower with energy-effcienct BLDC-technology. High extraction rates at very low noises with pleasant noise frequencies through psycho-acoustically and aerodynamically optimized interieur with enclosed, non-visible blower. Highly pressuredrop resistant even with longer and more

Pages from Bosch's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au