ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

SCHWEIGEN / RANGEHOOD

CL8912S Silent BBQ Alfresco Rangehood



RANGE
Silent BBQ Alfresco
TYPE
Rangehood
WIDTH
120 cm
FUEL
Electric
FINISHES
Stainless steel, Matte black
CODE
CL8912S / CL8912BS / CL8915S / CL8915BS

WARRANTY (DOMESTIC USE)

Silent and Design rangehoods: 5 years / Isodrive motor: 10 years (replacement in years 1 to 5, discounted replacement in years 6 to 10)

Conditions: domestic use (commercial use 3 months); installed to Schweigen's instructions; proof of purchase. Summary of the Schweigen warranty sheet, checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Built for outdoor kitchens, 304 grade stainless steel
- Pyramid canopy, 1200 x 800 mm (1500 mm also available)
- Silent Isodrive motor, 3000 to 5000 m3/h options
- Commercial grade dishwasher-safe baffles
- Touch controls with remote, auto shut-off

DIMENSIONS

The dimension drawing and full specifications from Schweigen follow on the next page.

Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

CL8912S, CL8915S, CL8912BS, CL8915BS // 120cm & 150cm // SILENT



// CL8912S (120cm)





The CL8812S or CL8815S wallmount rangehood comes with silent air extraction from the Isodrive® motor system. It is constructed with the highest quality stainless steel and designed to withstand the harsh Australian environment.

The pyramid design ensures a large extraction zone to effectively capture smoke and airborne grease over any barbecue via 4-speed touch, remote control and 10-minute auto-shutoff function.



// CL8915S (150 cm, stainless steel) and CL8915BS (150 cm, matte black)



// CL8912BS (120 cm, matte black) and CL8912S (120 cm, stainless steel)

PRODUCT DESCRIPTION

- quality 304 grade stainless steel and matte black available
- silent Isodrive® motor
- 4 speed touch sensitive controls, with remote
- 10 minute auto shut off
- GU10 LED lights with a lifetime warranty
- dishwasher safe, commercial grade baffles
- 5 Year rangehood Warranty


TECHNICAL DATA

- **CL8912S** dimensions: (W x D) 1200 x 800 mm, 6 x baffles, 4 x LED lights
- **CL8915S** dimensions: (W x D) 1500 x 800 mm, 8 x baffles, 4 x LED lights

ISODRIVE® OPTIONS

- **SP2** twin external motor
  - 3000 m³/h airflow
  - 200mm SteelFlex™ ducting (2 x 6m)
  - install roof/wall
  - rated power: 310W
- **SE** single external motor
  - 3200 m³/h airflow
  - 250mm SteelFlex™ ducting (4m)
  - 200mm SteelFlex™ ducting (2m)
  - SE accessory kit required
  - install roof/wall
  - rated power: 137W
- **SE2** Twin external motor
  - 5000 m³/h airflow
  - 2 x 250mm SteelFlex™ ducting (4m)
  - 2x 200mm SteelFlex™ ducting (2m)
  - 2 x 200-250mm reducer
  - install roof/wall
  - rated power: 274W

CL8912S, CL8915S, CL8912BS, CL8915BS // 120cm & 150cm // **SILENT**

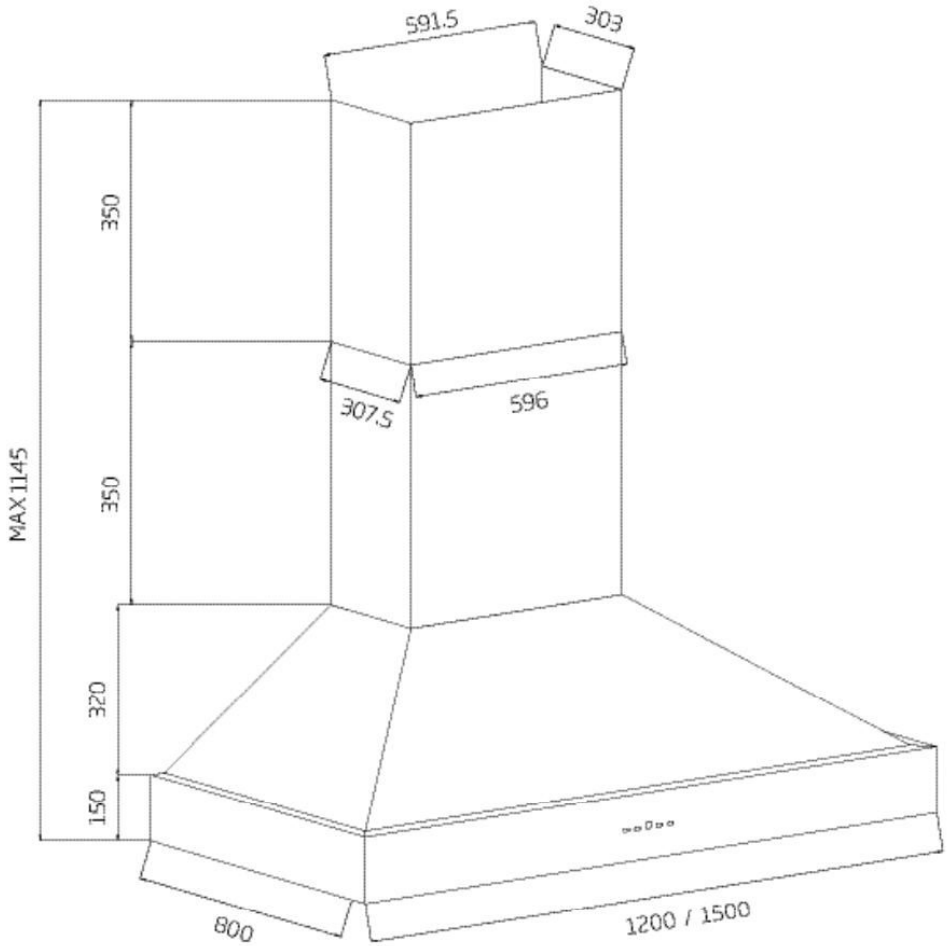

Model:	CL8912S, CL8912BS, CL8915S, CL8915BS
Feeding Voltage:	220-240V 50Hz
Max Lamp Power:	4 x 3W
ILCOS Code:	DRR-3-H-GU10-51/55