ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

SCHWEIGEN / RANGEHOOD

DS3131 Silent Wallmount Rangehood with Blue LED Strip



RANGE
Silent Wallmount
TYPE
Rangehood
WIDTH
89.8 cm
FUEL
Electric
FINISHES
Stainless steel, Matte black
CODE
DS3131-R2S / DS3131-R2BS

WARRANTY (DOMESTIC USE)

Silent and Design rangehoods: 5 years / Isodrive motor: 10 years (replacement in years 1 to 5, discounted replacement in years 6 to 10)

Conditions: domestic use (commercial use 3 months); installed to Schweigen's instructions; proof of purchase. Summary of the Schweigen warranty sheet, checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Slim canopy with signature blue LED strip
- Height adjustable 675 to 1190 mm
- Silent external Isodrive motor, 900 or 1600 m3/h
- Soft-touch controls, 5 speeds, auto shut-off
- Dishwasher-safe stainless mesh filters

DIMENSIONS

The dimension drawing and full specifications from Schweigen follow on the next page.

Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

DS3131-R2S, DS3131-R2BS // 90cm // **SILENT** with LED Strip



// DS3131-R2S (90cm)

The DS3131-R2S delivers high performance and style with silent and powerful extraction capability. The striking blue LED illumination strip creates a beautiful visual statement in any kitchen, forging a perfect union of form and function.

Other convenient features include soft-touch controls with 5 speed levels and a 10 minute auto shut-off timer, so you can leave the kitchen and the rangehood will switch off after clearing the air.



// DS3131-R2BS (90cm)

DESCRIPTION

- Stainless steel and Matte black available
- blue light display
- silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe filters
- 5 Year Warranty on canopy

ISODRIVE® OPTIONS


- **ST** single external motor
  - 900 m³/h airflow
  - 200mm SteelFlex™ ducting (4m)
  - install roof/wall
  - rated power: 57W
- **SP** single external motor
  - 1600 m³/h airflow
  - 200mm SteelFlex™ ducting (6m)
  - install roof/wall
  - rated power: 155W

TECHNICAL DATA

DS3131-R2S

- dimensions: (W x D) 898 x 500 mm
- 3 x mesh filters

DS3131-R2S, DS3131-R2BS // 90cm // **SILENT** with LED Strip

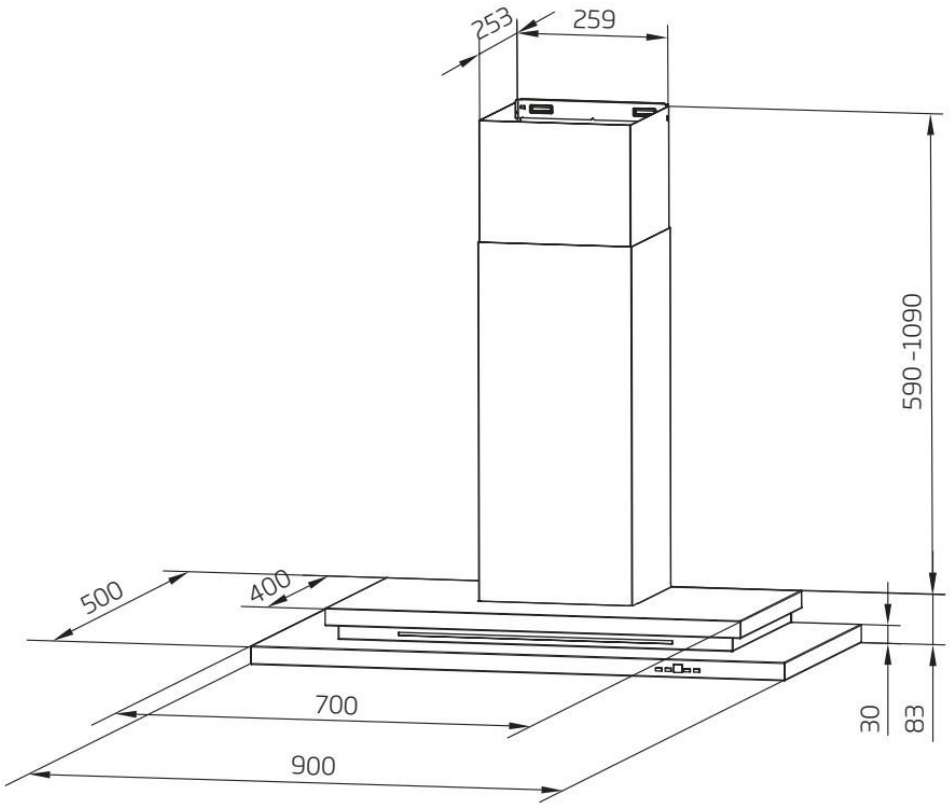

Model:	DS3131-R2S, DS3131-R2BS
Feeding Voltage:	220-240V 50Hz
Max Lamp Power:	2 x 3W