ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

SCHWEIGEN / RANGEHOOD

IS4110S Silent Island Rangehood



RANGE
Silent Island
TYPE
Rangehood
WIDTH
89.8 cm
FUEL
Electric
FINISHES
Stainless steel
CODE
IS4110S

WARRANTY (DOMESTIC USE)

Silent and Design rangehoods: 5 years / Isodrive motor: 10 years (replacement in years 1 to 5, discounted replacement in years 6 to 10)

Conditions: domestic use (commercial use 3 months); installed to Schweigen's instructions; proof of purchase. Summary of the Schweigen warranty sheet, checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Angular low-profile island canopy
- Height adjustable 520 to 975 mm
- Silent external Isodrive motor, 900 to 3200 m3/h
- 5 speeds, 15 minute auto shut-off
- Free ducting, baffles optional

DIMENSIONS

The dimension drawing and full specifications from Schweigen follow on the next page.

Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

IS4110S // 90cm // SILENT Island Rangehood



// IS4110S (90cm)





You couldn't ask for more with this strikingly designed rangehood. Adapting European design and German engineered silent technology, the IS4110S is less bulky than many of the traditional style rangehoods. As most canopies tend to make a room feel smaller, the IS4110S does the opposite and is able to open up an entire kitchen space. The angular look of this rangehood has become extremely popular in modern kitchens, boasting features such as soft-touch eye level controls, stainless steel finish and a 15 minute delay timer with automatic shut-off.

PRODUCT DESCRIPTION

- stainless steel finish
- Silent Isodrive® motor system
- soft-touch controls, digital display
- 5 x speed levels
- 15 minute delay timer with auto shut-off
- 2 x LED lights
- stainless steel, dishwasher safe mesh filters
- free ducting
- 5 Year Warranty on Canopy

TECHNICAL DATA

IS4110S


- dimensions: (W x D) 898 x 660 mm
- 4 x mesh filters


ISODRIVE® OPTIONS

- **ST** single external motor
  - 900 m³/h airflow
  - 200mm SteelFlex™ ducting (4m)
  - install roof/wall
  - rated power: 57W
- **SP** single external motor
  - 1600 m³/h airflow
  - 200mm SteelFlex™ ducting (6m)
  - install roof/wall
  - rated power: 155W
- **SE** single external motor
  - 3200 m³/h airflow
  - 250mm SteelFlex™ ducting (4m)
  - 200mm SteelFlex™ ducting (2m)
  - SE accessory kit required
  - install roof/wall
  - rated power: 137W


BAFFLES OPTIONAL

IS4110S // 90cm // **SILENT Island Rangehood**

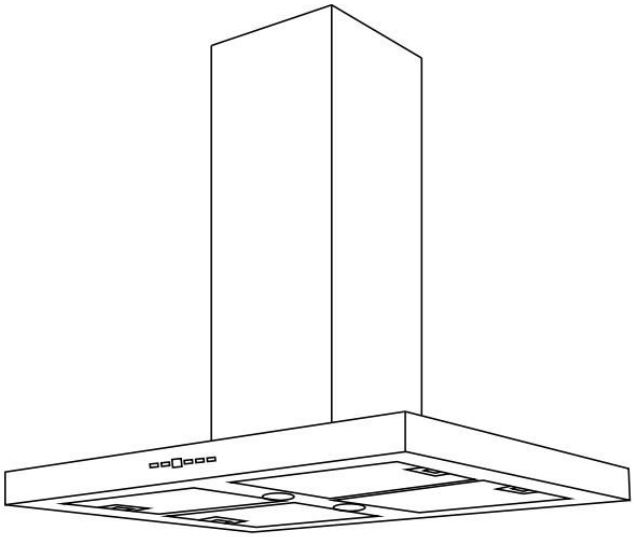

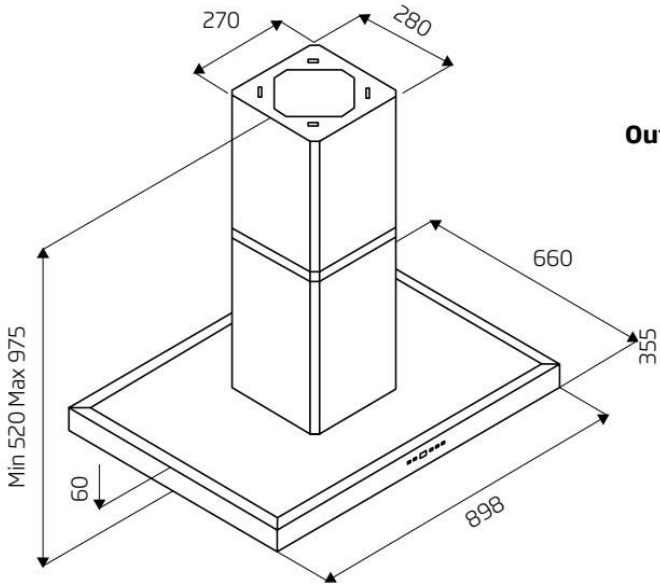

Outlet Box Dimensions

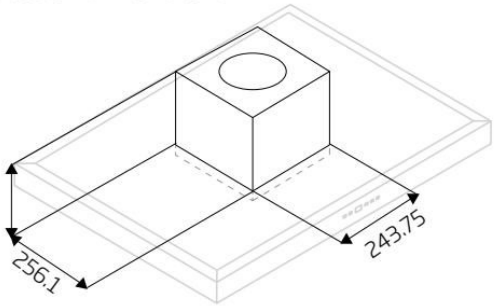

Model:	IS4110S
Feeding Voltage:	220-240V 50Hz
Max Lamp Power:	2 x 3W