ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

SCHWEIGEN / RANGEHOOD

UM-PA9S Silent Undermount Rangehood with Ambient LED



RANGE
Silent Undermount
TYPE
Rangehood
WIDTH
89.5 cm
FUEL
Electric
FINISHES
Stainless steel
CODE
UM-PA9S

WARRANTY (DOMESTIC USE)

Silent and Design rangehoods: 5 years / Isodrive motor: 10 years (replacement in years 1 to 5, discounted replacement in years 6 to 10)

Conditions: domestic use (commercial use 3 months); installed to Schweigen's instructions; proof of purchase. Summary of the Schweigen warranty sheet, checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Fully concealed flat undermount design
- Ambient LED strip lighting
- Perimeter Aspiration
- Silent external Isodrive motor, 900 or 1600 m3/h
- 4 speeds with 15 minute auto shut-off

DIMENSIONS

The dimension drawing and full specifications from Schweigen follow on the next page.

Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

UM-PA9S // 90cm // SILENT




// UMPA-9S (90cm)

This sophisticated undermount provides powerful performance, while being discreetly mounted inside cabinetry. The UM-PA9S features an innovative ambient LED lighting system which allows for safe, clear vision while cooking.

One of the advantages of the UM-PA9S is the additional power of Perimeter Aspiration which targets air extraction towards the perimeter of the rangehood creating a smaller and more intense extraction area.



//4 speed soft touch control panel

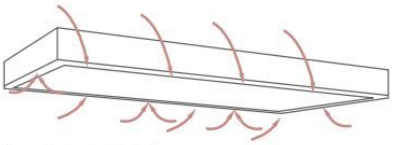

// Perimeter Aspiration Technology



PRODUCT DESCRIPTION

- stainless steel finish
- silent Isodrive® motor system
- soft touch controls
- 4 x speed levels
- 15 minute delay timer with auto shut-off
- strip LED illumination
- aluminium, dishwasher safe filter
- 5 Year Warranty on Canopy

MOTOR OPTIONS


- **ST** single external motor
  - 900 m³/h airflow
  - 200mm SteelFlex™ ducting (4m)
  - install roof/wall
  - rated power: 57W
- **SP** single external motor
  - 1600 m³/h airflow
  - 200mm SteelFlex™ ducting (6m)
  - install roof/wall
  - rated power: 155W


TECHNICAL DATA

UM-PA9S


- dimensions: (W x D) 895 x 295 mm
- 1 x mesh filter

UM-PA9S // 90cm // **SILENT**

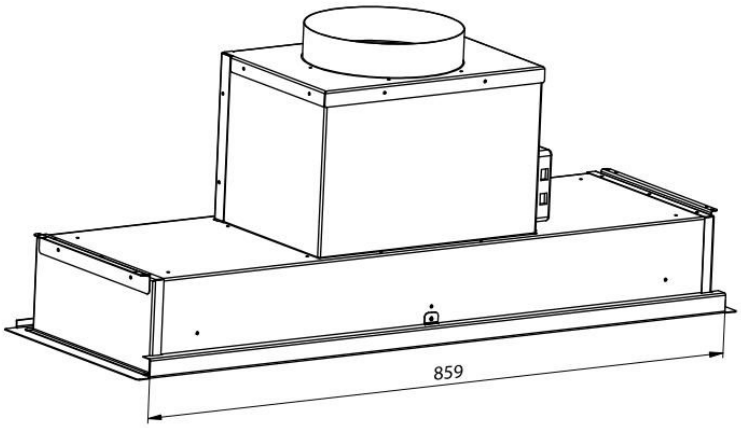


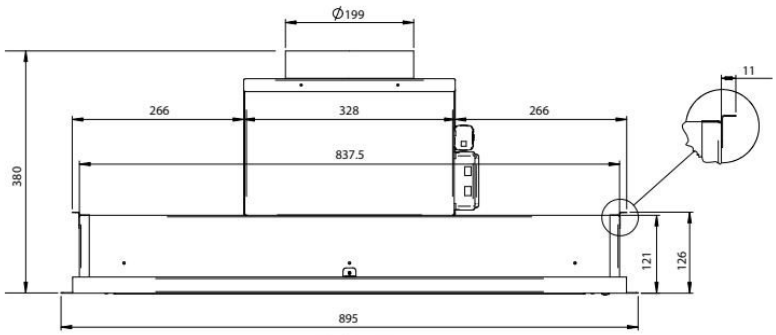

FRONT



SIDE

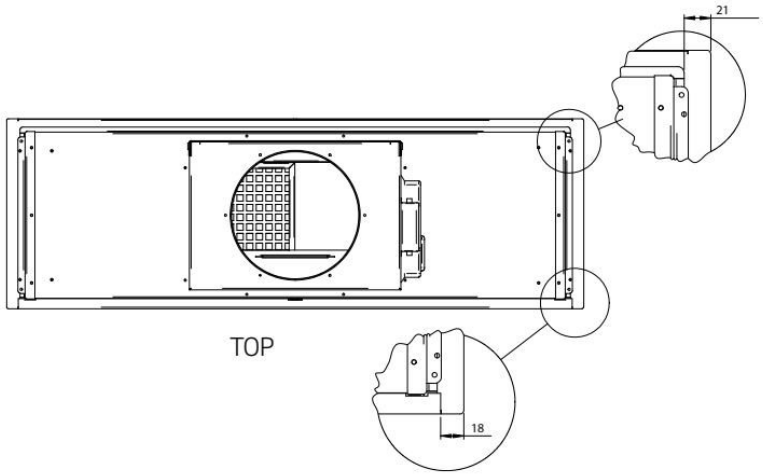

TOP

Model:	UM-PA9S
Feeding Voltage:	220-240V 50Hz
Max Lamp Power:	1 x LED Strip 726mm long 3.36W 12V 3000k