ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

FIENZA / WALL HUNG BASIN

Valentina Fluted Arch Concrete Wall Basin



RANGE
Valentina
TYPE
Wall hung basin
MATERIAL
Concrete
SIZE
465 x 360 x 119 mm
SURFACE
Fluted
TAP HOLE
None
OVERFLOW
No
COLOURS
Warm White, Sage, Tuscan, Warm Grey
CODE
RB078W / RB078SG / RB078TU / RB078

WARRANTY (DOMESTIC USE)

Concrete basin: 2 years, 1 year labour

Conditions: installed by a licensed tradesperson; proof of purchase; original owner. Summary of the Fienza warranty (from 1 September 2023), checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Natural variation in colour and texture; small pinholes are normal
- Fluted design
- Concrete with food-grade nano sealant
- No overflow
- Capacity 10.5L

DIMENSIONS

The dimension drawing and full specifications from Fienza follow on the next page.

fienza INSTALLATION GUIDE

Valentina
CONCRETE WALL BASIN

CHECK GOODS THOROUGHLY BEFORE INSTALLATION
Installation of received goods that are damaged, warped or faulty will void warranty. Ensure all items meet your plumbing requirements.

PLEASE LEAVE THIS GUIDE WITH THE OWNER

RB078

Warm Grey **RB078**
Warm White **RB078W**
Tuscan **RB078TU**
Sage **RB078SG**

- Fluted design
- Concrete with food-grade nano sealant
- No overflow
- Requires 32 mm non-overflow waste (not included)
- Extra heavy duty mounting brackets and bolts included





Installation Instructions

PLEASE READ CAREFULLY BEFORE INSTALLATION

The fixings supplied are suitable for solid masonry walls only. Plasterboard or stud walls may require specialist fixings (not supplied).

CAUTION: Care should be taken when drilling walls and floors to avoid any sunken electrical wires or water pipes.

FOR OTHER WALL CONSTRUCTION SYSTEMS USE SUITABLE FIXING METHOD.

All installations should be carried out by a qualified tradesman in compliance with the National Plumbing & Drainage Code and any State or Local Authority Regulations, in accordance with AS/NZS 3500 series of standards and AS/NZA 6400. All measurements are in millimetres and are subject to change without notice. For ceramic products, please allow +/- 10 mm tolerance for manufacturing variance. Please refer to fienza.com.au for the latest product specification.

Pages from Fienza's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

fienza INSTALLATION GUIDE

Basin Installation with Fixing Kit

1. Mark out the installation height and the centre line of the basin on the finished wall at the recommended height as shown and prepare water inlet and outlet connections.

Note: Installation height for AS2428.1 compliance must be at 840mm to be compliant. Height is the distance from the floor to the top surface of the front of the basin.

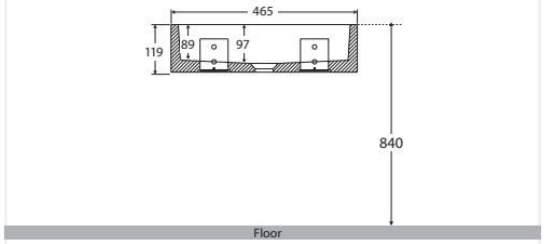

2. Fit the two mounting brackets to the basin with the provided M5 x 10mm screws and flat washers and tighten. Please note the brackets are left and right specific.

Caution: Do not over tighten the bracket to basin screws as this may damage the concrete basin.

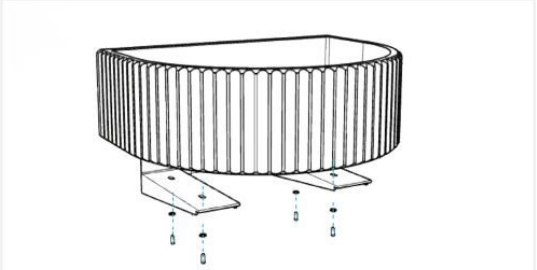

3. Measure and record the mounting hole locations of the basin mounting brackets. Transfer the mounting hole locations to the wall according to the centre line and adjust to be flat and centred. Drill the four marked holes in masonry wall using a masonry drill bit, to the required depth. Push the supplied wall plug into each hole.

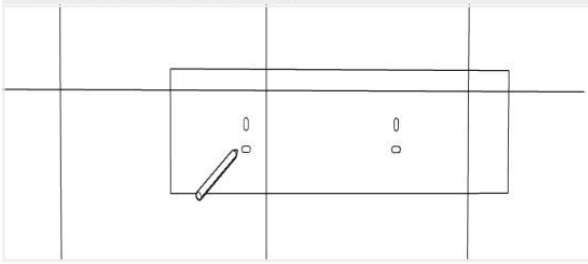

4. Remove the mounting brackets from the basin.

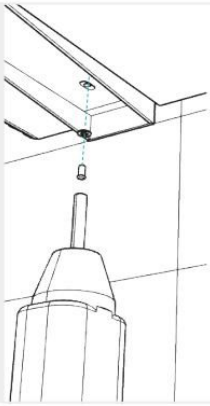

5. Place the mounting brackets in position against the wall, locating the wall plug holes through the holes in the basin brackets. Screw a mounting screw into each wall plug to secure the mounting brackets to the wall.

Caution: Do not over tighten the anchor bolt nuts.

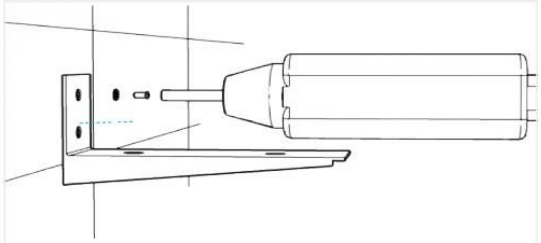

6. Screw the basin to the mounting brackets with the provided M5 x 10mm screws and flat washers and tighten.

Caution: Do not over tighten the bracket to basin screws as this may damage the concrete basin.

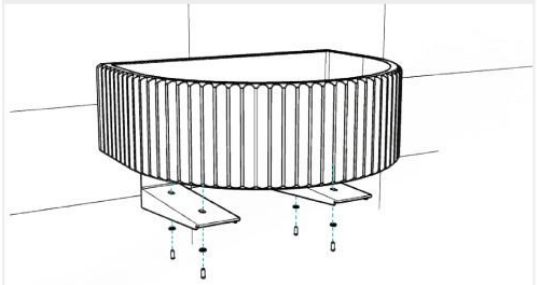

7. Install the tapware and the waste plug according to the installation instructions for the fittings. Connect the water supply pipe and the drainage pipe.

Note: Connect the hot water and cold water pipes according to the tapware markings.

All installations should be carried out by a qualified tradesman in compliance with the National Plumbing & Drainage Code and any State or Local Authority Regulations, in accordance with AS/NZS 3500 series of standards and AS/NZA 6400. All measurements are in millimetres and are subject to change without notice. For ceramic products, please allow +/- 10 mm tolerance for manufacturing variance. Please refer to fienza.com.au for the latest product specification.

Pages from Fienza's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au