ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

LAUXES GRATES / FLOOR GRATES AND DRAINS

Storm Water NXT



RANGE
Storm Water
TYPE
Floor grate or shower drain
SIZES
19 mm deep x 109 mm wide x 3000 mm, 19 mm deep x 128 mm wide x 3000 mm
FINISHES
Silver, Midnight
CODE
SW109 / SW128
MATERIAL
Aluminium

WARRANTY (DOMESTIC USE)

Rustproof: Lifetime, to the original owner / Fading and discoloration: Minimum 25 years

Conditions: Installed by a licensed plumber to AS 3740-2010 and AS/NZS 3500.2; Primary clean straight after installation, then regular care; Does not cover wear, misuse, accidental damage or poor cleaning. Summary of the Lauxes Grates Rustproof Warranty (with Warranty and Discoloration Warranty PDFs), checked 7 November 2026. Full terms from Romano or the brand.

FEATURES


- Replacement top for plastic storm water drainage channel
- Suits driveways and alfresco areas
- Rated for loads up to 10.2 tonne
- Easy to remove for cleaning
- 100% UV stable

DIMENSIONS

The dimension drawing and full specifications from Lauxes Grates follow on the next page.

Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

128 STORMWATER NXT (SW129)




Code	SW128-S-3, SW128-M-3
Colours Available	Silver, Midnight

PRODUCT SPECIFICATIONS

Length	3000mm
Width	128mm
Depth	19mm (Top Only)
Material	Anodised Aluminium
Weight	4.0kg

Applications	Outdoor
Features	• Sleek Design • Easy Installation • High Water Flow • Lifetime Rustproof Warranty • UV Stable • Replacement Top Only
Load Rating	Class B - Maximum Load at 10.2 tons

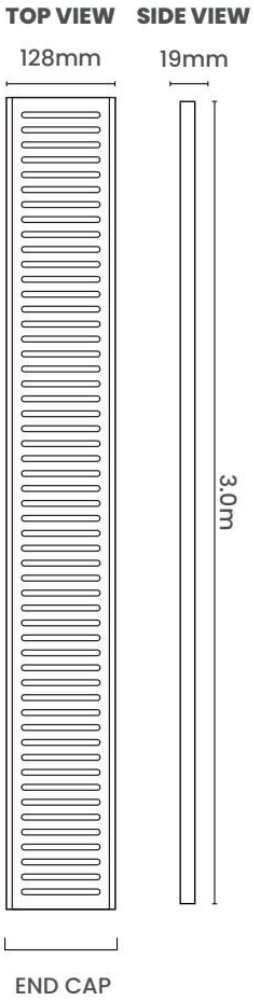

* Total length of full grate is 3.2m, total usable length is 3.0m to allow for any wastage during the anodising process.

* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.


Warranty & Care Information

www.lauxesgrates.com.au

1300 214 510

Cutting Instructions & Installation

For ease of cutting Lauxes grates, we recommend using a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more.

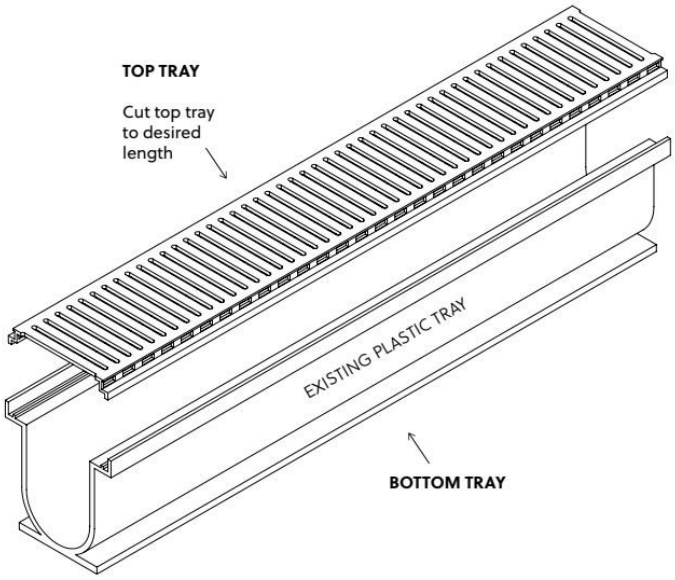

*** During installation ensure the grate does not come in contact with any wet cement based products.**

1. Cut your Lauxes grate to the desired length.
2. Remove existing plastic top tray.
3. Replace with new Lauxes Storm Water top tray.

Installation to be by a licensed plumber and in accordance with AS/NZS 3500.2.

Disclaimer: All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.

Warranty & Care Information

www.lauxesgrates.com.au