ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

NERO / RAIL SHOWER

Mecca Shower Rail With Air Shower II



RANGE
Mecca
TYPE
Rail shower
FINISHES
Brushed Bronze, Brushed Gold, Brushed Nickel, Chrome, Gunmetal, Matte Black, Matte White
WELS RATING
3 star
FLOW
9.0 litres a minute
MATERIAL
Brass

WARRANTY (DOMESTIC USE)

Products or parts: 25 years replacement on all finishes / Hand showers, shower heads and hoses: 25 years, replacement only (labour not included) / Parts and labour: 2 years replacement products or parts and labour

Conditions: installed by a licensed plumber; proof of purchase; residential use. Summary of the Nero warranty policy NWP2026.3 (sold after 1 May 2024), checked 7 November 2026. Full terms from Romano or the brand.

FEATURES


- Brass construction
- WELS 3 star, 9.0 L/min

DIMENSIONS

The dimension drawing and full specifications from Nero follow on the next page.


Mecca Shower Rail With Air Shower II

Nero



Versions:202506

Drawing

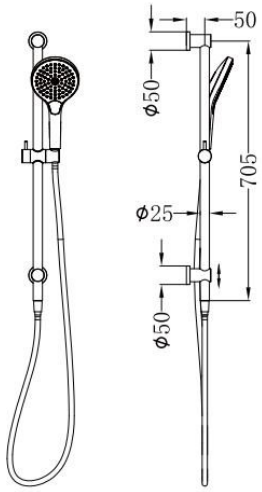

Specifications

Watermark License
WM-060093

Temperature Rating
Min 1˚C-Max 75˚C

Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

1x Hand Shower (Built- In Check Valve)
1x 1.5m PVC Hose
1x Shower Rail

Finish & SKU


- Chrome NR221905gCH
- Gun Metal NR221905gGM
- Brushed Bronze NR221905gBZ
- Brushed Nickel NR221905gBN
- Matte Black NR221905gMB
- Brushed Gold NR221905gBG
- Matte White NR221905gMW

*Dimensions are nominal measurements only.


Important

All products must be installed by licensed plumbers.


All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

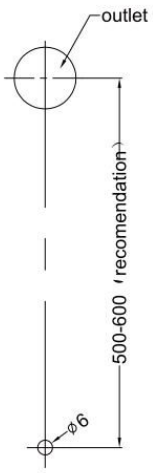


1.Drill a φ6mm hole at the downwards outlet vertical downward position in the recomendation range.

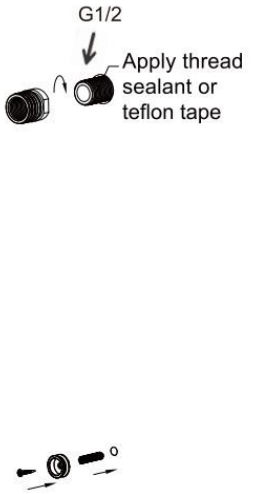


2. Screw the adapter onto the outlet. Push wall plug into drilled hole. Fit lower mounting pillar in place with screw. Tighten firmly.



3. Slide both top and bottom back plate onto the rail assembly, as shown on the picture.



4. Push shower rail assembly onto the wall/tile face.
Tighten grub screws firmly.
Slide the back plates against the wall/tile face properly.

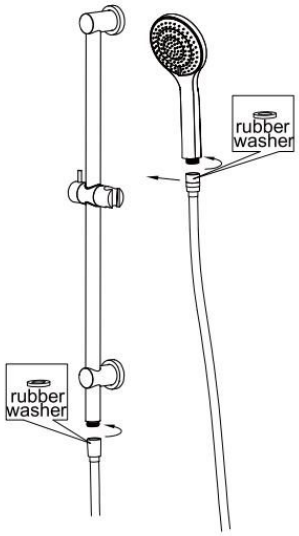

5. Connect shower rail and hand shower with hose.
TEST & CHECK FOR LEAKS.

Pages from Nero's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au