ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

CLARK / KITCHEN SINK

Arctic Single Bowl Undermount Sink



RANGE
Arctic
TYPE
Kitchen sink
BOWLS
Single
MATERIAL
Stainless steel
FINISHES
Stainless steel
CODE
ARC10BU

WARRANTY (DOMESTIC USE)

Stainless steel sink: Lifetime cover for replacement product or parts only; 1 year cover for labour

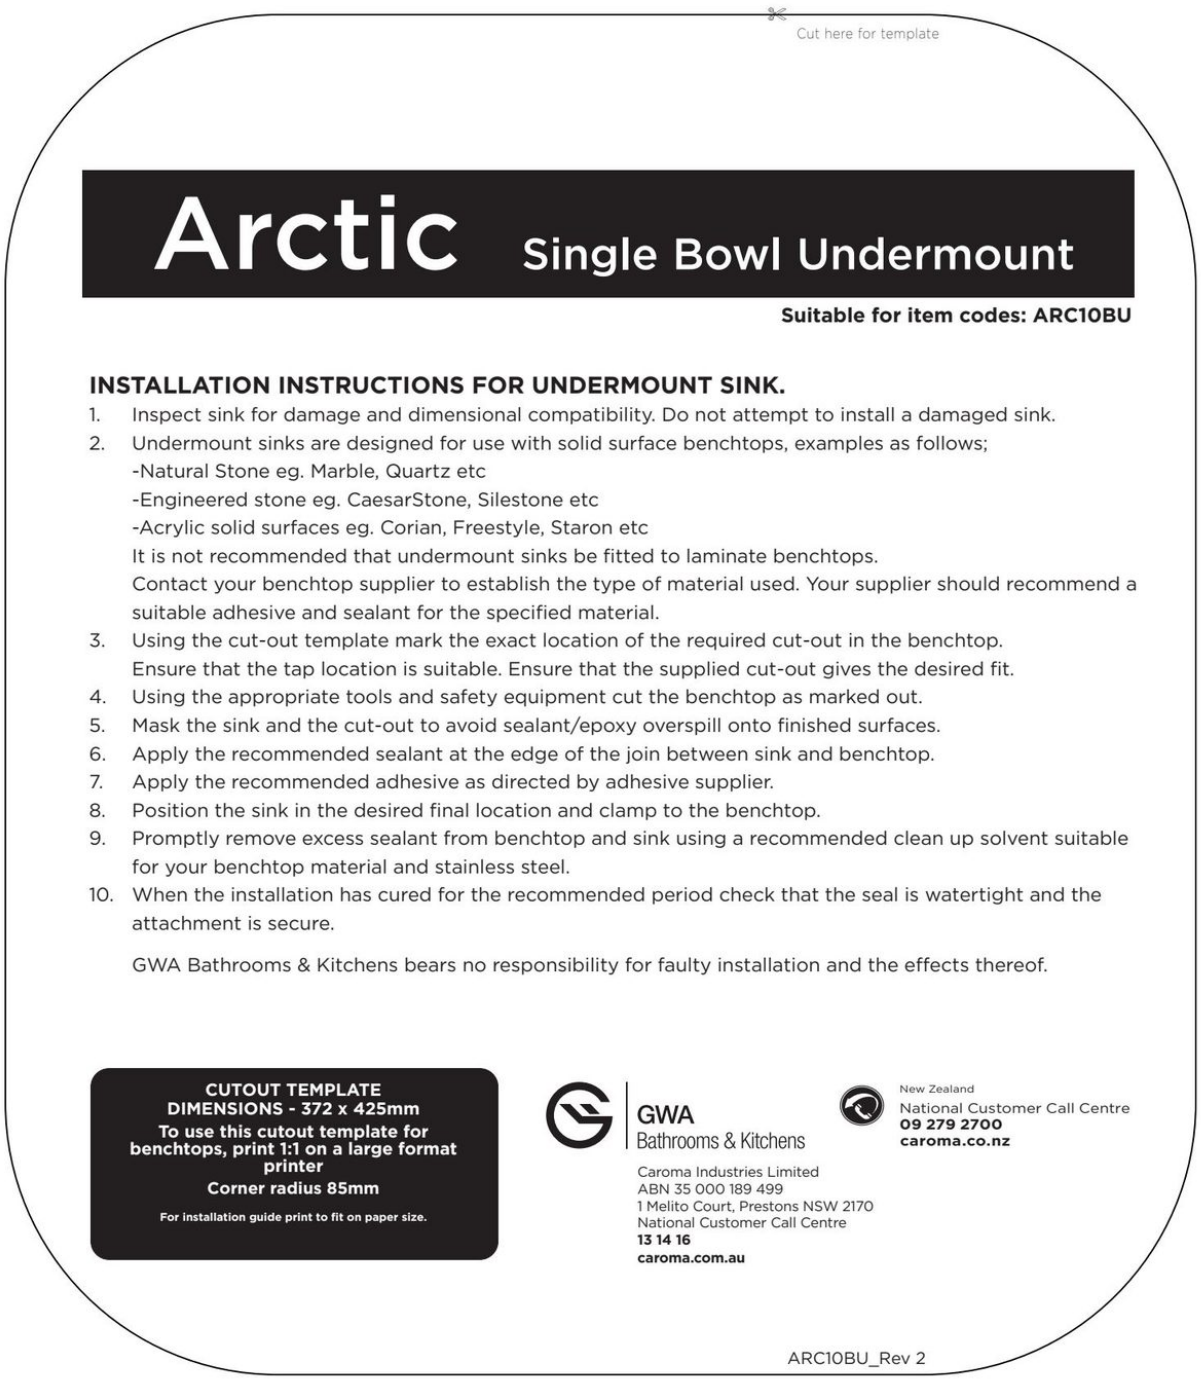
Conditions: Covers defects from faulty materials or workmanship only; Not covered: misuse, accidents, harsh conditions or repairs by anyone other than a licensed agent; Scratching and general surface wear from normal use are excluded from the finish cover. Summary of the Caroma Warranty Conditions, version 16, effective 1 April 2026 (PDF: cdn.caroma.com Update, checked 7 November 2026. Full terms from Romano or

FEATURES

- Compact polished single bowl
- Undermount for a clean benchtop line
- Suits stone and solid surface benchtops
- 304 grade stainless steel

DIMENSIONS

The dimension drawing and full specifications from Clark follow on the next page.


Cut here for template
Arctic Single Bowl Undermount
Suitable for item codes: ARC10BU
INSTALLATION INSTRUCTIONS FOR UNDERMOUNT SINK.
1. Inspect sink for damage and dimensional compatibility. Do not attempt to install a damaged sink.
2. Undermount sinks are designed for use with solid surface benchtops, examples as follows;
-Natural Stone eg. Marble, Quartz etc
-Engineered stone eg. CaesarStone, Silestone etc
-Acrylic solid surfaces eg. Corian, Freestyle, Staron etc
It is not recommended that undermount sinks be fitted to laminate benchtops.
Contact your benchtop supplier to establish the type of material used. Your supplier should recommend a suitable adhesive and sealant for the specified material.
3. Using the cut-out template mark the exact location of the required cut-out in the benchtop.
Ensure that the tap location is suitable. Ensure that the supplied cut-out gives the desired fit.
4. Using the appropriate tools and safety equipment cut the benchtop as marked out.
5. Mask the sink and the cut-out to avoid sealant/epoxy overspill onto finished surfaces.
6. Apply the recommended sealant at the edge of the join between sink and benchtop.
7. Apply the recommended adhesive as directed by adhesive supplier.
8. Position the sink in the desired final location and clamp to the benchtop.
9. Promptly remove excess sealant from benchtop and sink using a recommended clean up solvent suitable for your benchtop material and stainless steel.
10. When the installation has cured for the recommended period check that the seal is watertight and the attachment is secure.
GWA Bathrooms & Kitchens bears no responsibility for faulty installation and the effects thereof.
CUTOUT TEMPLATE
DIMENSIONS - 372 x 425mm
To use this cutout template for benchtops, print 1:1 on a large format printer
Corner radius 85mm
For installation guide print to fit on paper size.
GWA
Bathrooms & Kitchens
Caroma Industries Limited
ABN 35 000 189 499
1 Melito Court, Prestons NSW 2170
National Customer Call Centre
13 14 16
caroma.com.au
New Zealand
National Customer Call Centre
09 279 2700
caroma.co.nz
ARC10BU_Rev 2
372mm Wide
425mm Deep