ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

CLARK / KITCHEN SINK

Polar Double Bowl Inset Sink



RANGE
Polar
TYPE
Kitchen sink
BOWLS
Double
MATERIAL
Stainless steel
SIZES
790 x 470 x 200 mm
BOWL DEPTH
200 mm
TAP HOLES
Optional
FINISHES
Stainless steel
CODE
PPL20B.1 / PPL20B

WARRANTY (DOMESTIC USE)

Stainless steel sink: Lifetime cover for replacement product or parts only; 1 year cover for labour

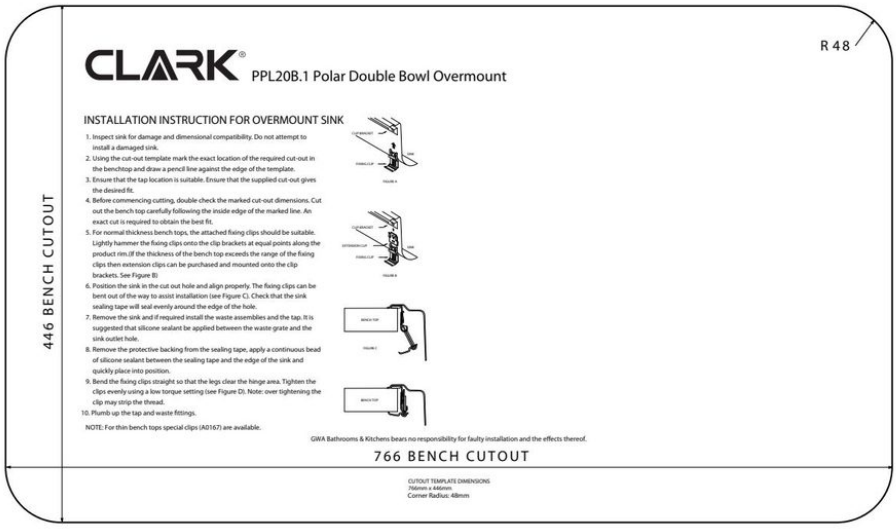
Conditions: Covers defects from faulty materials or workmanship only; Not covered: misuse, accidents, harsh conditions or repairs by anyone other than a licensed agent; Scratching and general surface wear from normal use are excluded from the finish cover. Summary of the Caroma Warranty Conditions, version 16, effective 1 April 2026 (PDF: cdn.caroma.com Update, checked 7 November 2026. Full terms from Romano or

FEATURES

- Two 26 litre bowls
- Available with or without a tap hole
- Cut-out 766 x 446 mm with 48 mm corner radius
- 304 grade polished stainless steel

DIMENSIONS

The dimension drawing and full specifications from Clark follow on the next page.


R 48
CLARK
PPL20B.1 Polar Double Bowl Overmount
INSTALLATION INSTRUCTION FOR OVERMOUNT SINK
1. Inspect sink for damage and dimensional compatibility. Do not attempt to install a damaged sink.
2. Using the cut-out template mark the exact location of the required cut-out in the benchtop and draw a pencil line against the edge of the template.
3. Ensure that the tap location is suitable. Ensure that the supplied cut-out gives the desired fit.
4. Before commencing cutting, double check the marked cut-out dimensions. Cut out the bench top carefully following the inside edge of the marked line. An exact cut is required to obtain the best fit.
5. For normal thickness bench tops, the attached fixing clips should be suitable. Lightly hammer the fixing clips onto the clip brackets at equal points along the product rim.(If the thickness of the bench top exceeds the range of the fixing clips then extension clips can be purchased and mounted onto the clip brackets. See Figure B)
6. Position the sink in the cut out hole and align properly. The fixing clips can be bent out of the way to assist installation (see Figure C). Check that the sink sealing tape will seal evenly around the edge of the hole.
7. Remove the sink and if required install the waste assemblies and the tap. It is suggested that silicone sealant be applied between the waste grate and the sink outlet hole.
8. Remove the protective backing from the sealing tape, apply a continuous bead of silicone sealant between the sealing tape and the edge of the sink and quickly place into position.
9. Bend the fixing clips straight so that the legs clear the hinge area. Tighten the clips evenly using a low torque setting (see Figure D). Note: over tightening the clip may strip the thread.
10. Plumb up the tap and waste fittings.
NOTE: For thin bench tops special clips (A0167) are available.
GWA Bathrooms & Kitchens bears no responsibility for faulty installation and the effects thereof.
446 BENCH CUTOUT
766 BENCH CUTOUT
CUTOUT TEMPLATE DIMENSIONS
766mm x 446mm
Corner Radius: 48mm