ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

TURNER HASTINGS / KITCHEN SINK

# Cuisine One and a Half Bowl Inset or Undermount Sink



RANGE
Cuisine
TYPE
Kitchen sink
BOWLS
One and a half
MATERIAL
Fireclay or ceramic
SIZES
930 x 480 mm
BOWL DEPTH
220 mm
TAP HOLES
None
FINISHES
Gloss White, Matte White, Matte Black
CODE
CUD93FS-OF / CUD93FS / CUD933FS-MW-OF / CUD933FS-MW / CUD93FS-MB-OF / CUD93FS-MB

## WARRANTY (DOMESTIC USE)

Fine fireclay sinks (indoor and outdoor use), domestic: Lifetime

Conditions: installed by a licensed tradesperson; manufacturing faults only; small natural variations are normal. Summary of the Turner Hastings installation, care and warranty information, checked 7 November 2026. Full terms from Romano or the brand.

## FEATURES

- One large (45 litre) and one small (27 litre) bowl
- Inset or undermount
- Gloss white, matte white or matte black
- Two basket wastes included

## DIMENSIONS

The dimension drawing and full specifications from Turner Hastings follow on the next page.


Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

TURNER HASTINGS

16 McPherson Rd, Smeaton Grange NSW 2567
**1300 00 2284**
ABN 56 263 133 253
**www.turnerhastings.com.au**
info@turnerhastings.com.au

# INSET AND UNDERMOUNT SINK INSTALLATION GUIDES

Thank you for purchasing a Turner Hastings Fine Fireclay Inset/Undermount Sink. If you have any questions during the installation of this product, please do not hesitate to call us on 1300 00 2284.

**BEFORE YOU BEGIN**

- Read these instructions carefully before you begin this installation.
- Observe all local plumbing and building codes.
- Due to the various cutout sizes possible, and natural variation in fireclay, we recommend using the actual sink instead of the template where possible.
- Prior to installation, unpack the new sink and inspect it for damage. Return the sink to its protective carton until you are ready to install it.
- Due to the variety of installations possible with this sink, you may need to use procedures other than those described.
- It is very important that proper high-quality materials and silicones are used with your sink.
- The cabinet and frame shown in these instructions are generic and may not represent the actual design or structure.
- Due to the nature of undercounter installations, it is recommended that undercounter sink installations be performed by trained and experienced installers.
- To ensure a safe and damage-free installation, two people should install the sink.
- All information in these instructions is based on the latest product information available at the time of publication.





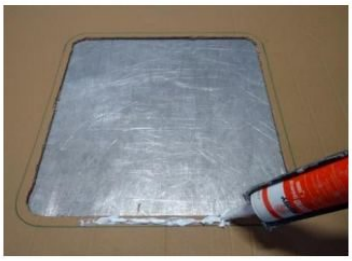
Pages from Turner Hastings's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

TURNER HASTINGS

16 McPherson Rd, Smeaton Grange NSW 2567
**1300 00 2284**
ABN 56 263 133 253
**www.turnerhastings.com.au**
info@turnerhastings.com.au



## 1. INSET

| | |
|---|---|
| 1. Place the sink upside down on the bench top. Trace around the outer edges on the bench top.<br> | 2. Draw a second line the correct distance inside the marked line based on the sink you have.<br> |
| 3. Cut out the bench top on the inside line<br> | 4. Install the waste in the sink, using silicone between the top flange and the sink<br> |
| 5. Apply silicone around the edge of the bench top<br> | 6. Place the sink into the benchtop, wipe away excess silicone, and leave to cure for 24 hours before use<br> |



Pages from Turner Hastings's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au