ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

TURNER HASTINGS / BUTLER AND FARMHOUSE SINK

Novi Fireclay Butler Sink



RANGE
Novi
TYPE
Butler and farmhouse sink
BOWLS
Single
MATERIAL
Fireclay or ceramic
SIZES
500 x 460 mm, 600 x 460 mm, 750 x 460 mm
BOWL DEPTH
210 mm
TAP HOLES
None
FINISHES
Concrete Look, Gloss White, Matte White, Matte Black
CODE
NO604FS-CL-OF / NO604FS-CL / NO60FS-OF / NO60FS / NO603FS-MW / NO603FS-MW-OF / NO60FS-MB-OF / NO60FS-MB

WARRANTY (DOMESTIC USE)

Fine fireclay sinks (indoor and outdoor use), domestic: Lifetime

Conditions: installed by a licensed tradesperson; manufacturing faults only; small natural variations are normal. Summary of the Turner Hastings installation, care and warranty information, checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Reversible: ribbed or flat front can face out
- Fits as a butler, counter top or under counter sink
- Sizes 50, 60 and 75, with or without overflow
- Glossy, matte or concrete look finish
- Basket waste included

DIMENSIONS

The dimension drawing and full specifications from Turner Hastings follow on the next page.

TURNER HASTINGS

16 McPherson Rd, Smeaton Grange NSW 2567
1300 00 2284
ABN 56 263 133 253
www.turnerhastings.com.au
info@turnerhastings.com.au

FINE FIRECLAY BUTLER SINK INSTALLATION INSTRUCTIONS

Thank you for purchasing a Turner Hastings Fine Fireclay Butler Sink. If you have any questions during the installation of this product, please do not hesitate to call us on 1300 00 2284.

BEFORE YOU BEGIN


In addition to the below instructions, for your convenience we have a **how-to install a butler sink video** available here https://youtu.be/JQSM0-eekso

- Read these instructions carefully before you begin this installation.
- Observe all local plumbing and building codes.
- Due to the various cut-out sizes possible, and natural variation in fireclay, a template is not supplied.
- Prior to installation, unpack the new sink and inspect it for damage. Return the sink to its protective carton until you are ready to install it.
- Due to the variety of installations possible with this sink, you may need to use procedures other than those described.
- It is very important that proper high-quality materials and silicones are used with your sink.
- The cabinet and frame shown in these instructions are generic and may not represent the actual design or structure.
- Due to the nature of undercounter installations, it is recommended that undercounter sink installations be performed by trained and experienced installers.
- To ensure a safe and damage-free installation, two people should install the sink.
- All information in these instructions is based on the latest product information available at the time of publication.


Pages from Turner Hastings's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au

TURNER HASTINGS
16 McPherson Rd, Smeaton Grange NSW 2567
1300 00 2284
ABN 56 263 133 253
www.turnerhastings.com.au
info@turnerhastings.com.au

1. CABINET/SUPPORT FRAME CONSTRUCTION

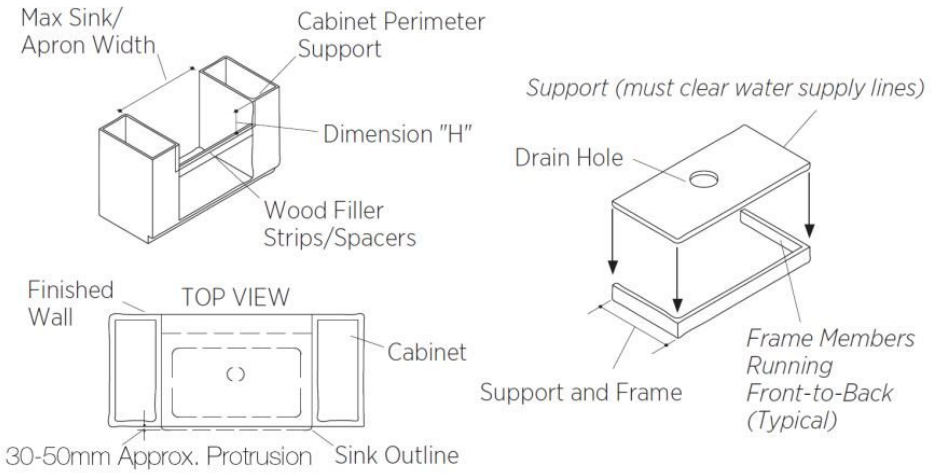

- Measure the width of the sink (the top of the sink is approximately 6 mm wider than the bottom)
- The cabinet opening should equal the maximum sink width to ensure a minimum gap between the sink and the cabinet.
- **NOTE:** If the sink is not available at the time of installation, make allowances to add wood filler strips or spacers to the cabinet opening after the frame and before the sink is installed.
- We recommend the sink extends 30 to 50mm beyond the front of the cabinet, but this is only for aesthetic reasons, and is the choice of the owner.
- Construct a wood support frame to fit inside the cabinet opening. Allow adequate clearance for the pipes between the support and the finished wall.
- Position the support frame in the cabinet opening so that when installed, the top of the sink will be level and flush with the top of the cabinet (Dimension H).
- Secure the support frame to the cabinet. Position the securing hardware to allow for easy removal should the sink need to be removed or replaced.
- Locate and cut out the waste outlet clearance hole in the support. The hole diameter must clear the garbage disposal mounting system, if used.

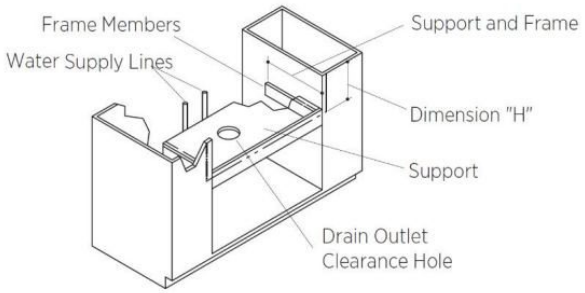

Pages from Turner Hastings's own specification. Ask us about this product, we're happy to help.
Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au