ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

CAROMA / BACK TO WALL TOILET SUITE

Riviere Wall Faced Close Coupled Suite



RANGE
Riviere
TYPE
Back to wall toilet suite
TRAP
S and P
S-TRAP SET-OUT
60 to 200 mm
PAN
Rimless
SEAT
Soft close quick release
FLUSH
4.5/3 litres
WELS RATING
4 star
COLOURS
Gloss White, Matte White
CODE
790002W / 790002MW

WARRANTY (DOMESTIC USE)

Pan and cistern: 20 years (replacement product or parts) / Seat: 5 years / Valve washers: 1 year parts and labour / Labour: 1 year

Conditions: installed by a licensed plumber to Australian standards; proof of purchase; original owner. Summary of the Caroma warranty v16 (April 2026), checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Traditional-inspired design with Cleanflush rimless bowl
- GermGard antimicrobial seat
- Supplied with Uni-Orbital connector and fixing bracket
- Optional coloured buttons to match Riviere tapware

DIMENSIONS

The dimension drawing and full specifications from Caroma follow on the next page.

Romano Indoor & Outdoor Solutions, 4/126 Canterbury Rd, Kilsyth South VIC 3137. 03 9720 4633. sales@romanoios.com.au



White


Matte White

CAROMA

Riviere Cleanflush® Wall Faced Close Coupled Toilet Suite

The Caroma Riviere Collection features an elegant design that brings together heritage and modern style. Designed to complement a range of interior styles, including coastal, traditional, farmhouse and Hamptons, the collection enhances every space with graceful contours and refined craftsmanship.

Combining contemporary styling, industry leading rimless pan technology and GermGard® Antibacterial Protection; a unique technology which kills harmful bacteria, Caroma Cleanflush™ is a superior flushing system suitable for domestic and commercial applications. Incorporating several patented technologies: Caroma Flow Splitter®, Caroma Flow Balancer® and Caroma Uni-Orbital® Connector, the Cleanflush pan is innovative and the next evolution in toilets. The Flow Splitter evenly flows water around the top of the bowl to meet at the Flow Balancer which directs the water powerfully into the sump, reducing the need for brush cleaning. The rimless pan is easy to clean and unlike traditional pan profiles, provides full visibility of any grime build up. Caroma Cleanflush® provides a cleaner clean for peace of mind.

Pan: Caroma Riviere Cleanflush® wall faced close coupled 4.5 litre full flush rimless pan.

Traps: Universal trap for S or P-trap installations.

Material: Vitreous china (pan and cistern only).

Cisterns: Caroma Riviere close coupled cistern – has a free fitting lid and is suitable for domestic and light commercial applications. Available with internal overflow. Available in either back entry or bottom inlet options. Cistern inlet stop valve and inlet connection is concealed within the cistern and is included (back entry version only). Vandal Resistant Conversion Kit – A simple to install conversion is available for the standard mechanism to lock lid onto the cistern, recommended for use in heavy use commercial areas. Code No.750109. **Important:** Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant. Accurate wall setout for B.S.P. $^{1}/_{2}$" Nipple water inlet connection is essential.


Buttons: The cistern button is suppplied in Chrome (C) but other colour options are available: Black (B), Brushed Brass (BB), Brushed Bronze (BBZ), Brushed Nickel (BN), Gunmetal Grey (GM). Code No.687071.


Fixing: The cistern is fixed directly to the pan with a robust concealed base fixing system without the need for wall fixing.

Seats: The Caroma Riviere soft close quick release thermoset toilet seat with GermGard® Antibacterial Protection; a unique technology which kills harmful bacteria, is provided as standard with seat caps in Stainless Steel (SS). Optional seat caps are available in 3 finishes, Black (B), Brushed Brass (BB), Brushed Bronze (BBZ) or Gunmetal Grey (GM). Code No.254213.

Colours: White (W) and Matte White (MW).

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.

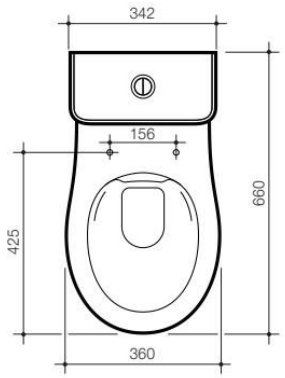





Product Description	Code No.	Colours
4.5/3 litre Back Entry Internal Overflow	790003	W, MW
4.5/3 litre RH Bottom Inlet Internal Overflow	790002	W, MW

GERMGARD ANTIBACTERIAL PROTECTION

cleanflush

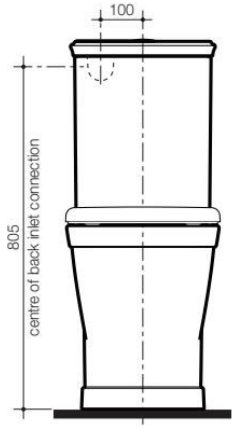

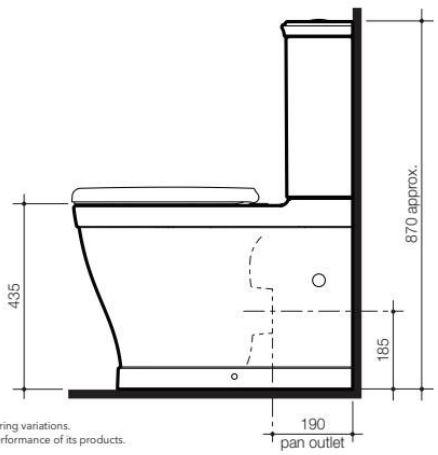

D82 Concealed Fixing Bracket (supplied)



Note: All height dimensions to underside of pan, make allowance for bedding when installing.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.

All dimensions are in millimetres and are subject to normal manufacturing variations.
Caroma pursues a policy of continuing improvement in design and performance of its products.
The right is therefore reserved to vary specifications without notice.

Revision: 0
Issue Date: 14/05/2026
Supersedes all previous issues