ROMANO
Indoor & Outdoor Solutions

SPEC SHEET

CAROMA / SMART TOILET

Urbane II Electronic Bidet Wall Faced Close Coupled Suite



RANGE
Urbane II
TYPE
Smart toilet
TRAP
S and P
S-TRAP SET-OUT
60 to 245 mm
PAN
Rimless
SEAT
Electronic auto open and close soft close
FLUSH
4.5/3 litres
WELS RATING
4 star
SMART FEATURES
Heated seat, Gender specific rear and front wash, Warm air dryer, Auto open lid, Auto close lid, Night light, Remote control, Deodoriser, Self cleaning nozzle
POWER
Needs power near the toilet (power cord outlet shown on the spec sheet); the toilet still flushes without power
COLOURS
Gloss White
CODE
848711W / 848710W

WARRANTY (DOMESTIC USE)

Pan and cistern: 20 years (replacement product or parts) / Electronic bidet seat: 2 years product, parts and labour

Conditions: installed by a licensed plumber to Australian standards; proof of purchase; original owner. Summary of the Caroma warranty v16 (April 2026), checked 7 November 2026. Full terms from Romano or the brand.

FEATURES

- Built-in electronic bidet seat with remote control and user presets
- Easy height Cleanflush rimless pan
- Dual check valves and air gap for backflow protection
- Back entry or right-hand bottom inlet versions

DIMENSIONS

The dimension drawing and full specifications from Caroma follow on the next page.

CAROMA

Revision: 0
Date: 24/05/2023

Supersedes all previous issues

Urbane II Electronic Bidet Cleanflush™ Easy Height

Vitreous China 4.5/3 litre Dual Flush Wall Faced Close-Coupled Rimless Toilet Suite



GERMGARD® ANTIBACTERIAL PROTECTION

cleanflush

The more stars the more water efficient
WATER RATING
www.waterrating.gov.au
3.5 litres average flush
4.5 L per full flush / 3 L per half flush
In accordance with AS/NZS 6400
Licence No. 0001
Caroma Industries Limited

CAROMA

Vitreous China 4.5/3 litre Dual Flush Wall Faced Close-Coupled Rimless Toilet Suite

Urbane II Bidet Cleanflush™ Easy Height

GERMGARD ANTIBACTERIAL PROTECTION

cleanflush



Back entry version of pan pictured

Our **Urbane II** bidets have a contemporary minimalistic design to match the rest of the **Urbane II** bathroom collection. Enjoy the ultimate flexibility of our innovative bidet seat, featuring gender specific washes, drying options and a self cleaning nozzle. Experience handy features that elevate your experience, including auto open & auto close seat, LED nightlight & ambient lighting, heated seat and a remote for full control.

This **Urbane II** toilet features **Cleanflush™** technology, our most effective and hygienic toilet. Our patented design features revolutionary rimless technology, is easy to clean and water efficient with superior hygiene.

In addition, **Urbane II** toilets have added **GermGard®** anti-bacterial protection to the seats.

Pan: **Urbane II Bidet Cleanflush™ Easy Height** wall faced close coupled 4.5 litre full flush rimless pan.

Traps: Universal trap for S or P-trap installations.

Cisterns: **Urbane II Bidet** close coupled cistern – has a free fitting lid and is suitable for domestic and light commercial applications. Available with internal overflow. Available in either back entry or bottom inlet options. Cistern inlet stop valve and inlet connection is concealed within the cistern and is included (back entry version only). **Vandal Resistant Conversion Kit** – A simple to install conversion is available for the standard mechanism to lock lid onto the cistern, recommended for use in heavy use commercial areas. Code No.750109.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant. Accurate wall setout for B.S.P. 1/2" Nipple water inlet connection is essential.


Buttons: The cistern button is available in 5 finishes: Chrome (C), Black (B), Brushed Brass (BB), Brushed Nickel (BN) and Gunmetal Grey (GM). Code No.687071. Code No.687071.

Fixing: The cistern is fixed directly to the pan with a robust concealed base fixing system without the need for wall fixing.


Seats: The **Urbane II Electronic Bidet** auto open & auto close toilet seat with GermGard® Antibacterial Protection; a unique technology which kills harmful bacteria, is provided as standard with this suite.

Colours: White only.


Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2. Reference must be made to the installation instructions for rough in details for water and power requirements.

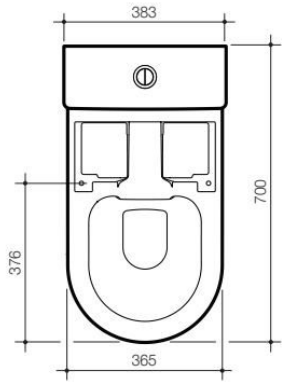

Uni-Orbital® Connector Setout Range 60mm to 245mm (up to 50mm sideways adjustment)

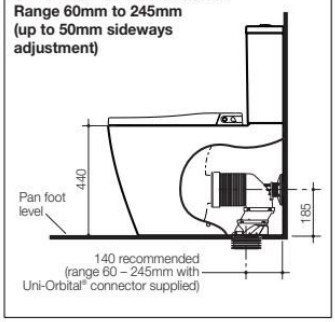

Urbane II Bidet Cleanflush™ Easy Height Wall Faced Close Coupled Toilet Suite with Urbane II Electronic Bidet Seat	Code No.
4.5/3 litre Back Entry Internal Overflow	848711
4.5/3 litre RH Bottom Inlet Internal Overflow	848710

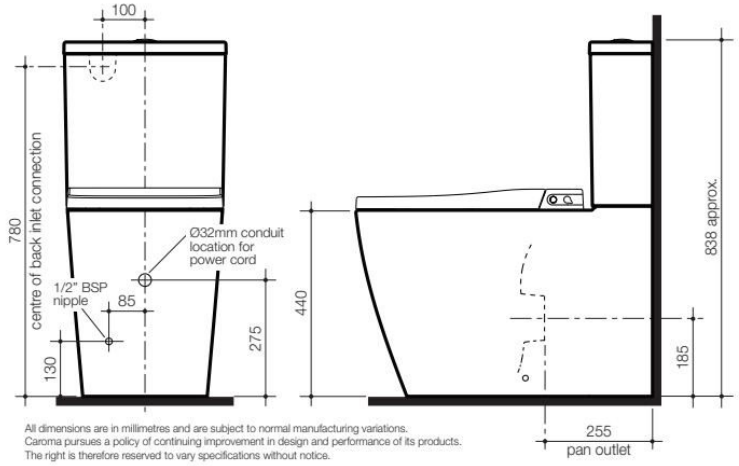

D82 Concealed Fixing Bracket (supplied)



Note: All height dimensions to underside of pan, make allowance for bedding when installing.

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.

All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Caroma Industries Limited ABN 35 000 189 499 **Sales Offices in all States.**